AD-A145 155 K-SHELL YIELD SCALING LAW FOR CONVENTIONAL PRS LOADS 1/1
(U) NAVAL RESEARCH LAB WASHINGTON DC
J P APRUZESE ET AL. 31 AUG 84 NRL-MR-5406

UNCLASSIFIED F/G 20/9 NL



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD-A145 155

DTIC FILE COPY

NRL Memorandum Report 5406

K-Shell Yield Scaling Law for Conventional PRS Loads

J. P. APRUZESE AND J. DAVIS

Plasma Radiation Branch
Plasma Physics Division

August 31, 1984

This research was sponsored by the Defense Nuclear Agency under Subtask T99QAXLA, work unit 00004, and work unit title "NRL Advanced Simulation Concepts Program."

DTIC
ELECTE
SEP 4 1984
S D
B

NAVAL RESEARCH LABORATORY
Washington, D.C.

Approved for public release; distribution unlimited.

84 08 31 080

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1a REPORT SECURITY CLASSIFICATION UNCLASSIFIED	1b RESTRICTIVE MARKINGS
2a SECURITY CLASSIFICATION AUTHORITY	3 DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution unlimited.
2b DECLASSIFICATION/DOWNGRADING SCHEDULE	
4 PERFORMING ORGANIZATION REPORT NUMBER(S) NRL Memorandum Report 5406	5 MONITORING ORGANIZATION REPORT NUMBER(S)
6a NAME OF PERFORMING ORGANIZATION Naval Research Laboratory 6b OFFICE SYMBOL (If applicable) Code 4720	7a NAME OF MONITORING ORGANIZATION
6c ADDRESS (City, State, and ZIP Code) Washington, DC 20375	7b ADDRESS (City, State, and ZIP Code)
8a NAME OF FUNDING/SPONSORING ORGANIZATION Defense Nuclear Agency 8b OFFICE SYMBOL (If applicable)	9 PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER
8c ADDRESS (City, State, and ZIP Code) Washington, DC 20305	10 SOURCE OF FUNDING NUMBERS PROGRAM ELEMENT NO: 62715H PROJECT NO: TASK NO: WORK UNIT ACCESSION NO: DN880-191
11 TITLE (Include Security Classification) K-Shell Yield Scaling Law for Conventional PRS Loads	
12 PERSONAL AUTHOR(S) Apruzese, J.P. and Davis, J.	
13a TYPE OF REPORT Interim 13b TIME COVERED FROM _____ TO _____ 14 DATE OF REPORT (Year, Month, Day) 1984 August 31 15 PAGE COUNT 23	
16 SUPPLEMENTARY NOTATION This research was sponsored by the Defense Nuclear Agency under Subtask T99QAXLA, work unit 00004, and work unit title "NRL Advanced Simulation Concepts Program."	
17 COSATI CODES FIELD / GROUP / SUB-GROUP	18 SUBJECT TERMS (Continue on reverse if necessary and identify by block number) K-shell yield; Z-pinch Zero-dimensional model; Scaled atomic data

19 ABSTRACT (Continue on reverse if necessary and identify by block number)

The simplified equation of motion for a Z-pinch implosion is combined with an empirical scaling law for K-shell yield as a function of temperature and density, and also with power law fits to K-shell atomic data to predict K-shell yields as a function of atomic number and generator power. Assuming the efficiency of future machines to approximate that of existing generators leads to the conclusion that argon will be a prolific PRS with generator powers of ~ 25 TW while titanium will require ~ 40 TW. Conventional iron and krypton loads will require superclass generators in the 50-100 TW range to be efficient K-shell radiators.

20 DISTRIBUTION/AVAILABILITY OF ABSTRACT ☒ UNCLASSIFIED/UNLIMITED ☐ SAME AS RPT ☐ DTIC USERS	21 ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED
22a NAME OF RESPONSIBLE INDIVIDUAL J. Davis	22b TELEPHONE (Include Area Code) (202) 767-3278 22c OFFICE SYMBOL Code 4720

DD FORM 1473, 84 MAR 83 APR edition may be used until exhausted
All other editions are obsolete

SECURITY CLASSIFICATION OF THIS PAGE

CONTENTS

I. INTRODUCTION 1

II. BASIC MODEL ELEMENTS 1

III. BASIC ATOMIC PHYSICS ENERGETICS 6

IV. CONCLUSIONS 9

ACKNOWLEDGMENTS 11

REFERENCES 11

DTIC
ELECTE
SEP 4 1984
B

Accession For
NTIS GRA&I
DTIC TAB
Unannounced
Justification
By
Distribution/
Availability Codes
Dist | Avail and/or Special
A-1

K-SHELL YIELD SCALING LAW FOR CONVENTIONAL PRS LOADS

I. INTRODUCTION

An interesting figure of merit often used to characterize the performance of Z-pinch devices such as BLACKJACK 5 at Maxwell Laboratories, Inc., and PITHON, of Physics International Corp. is the energy released in K-shell radiation during a discharge with a given element as the plasma load. On both PITHON and BLACKJACK 5, K-shell yields have been experimentally measured for load elements ranging from neon (Z=10) to krypton (Z=36). To date, BLACKJACK 5, and DOUBLE EAGLE with a maximum power of approximately 8-10 TW, represent the leading edge in the technology of such devices.

For theoretical analyses of the effects produced by these generators, a variety of tools and strategies have been developed, ranging from simple "zero-dimensional" implosion models[1-3] to detailed MRHD (Magneto Radiation HydroDynamic) codes containing atomic ionization dynamics and radiation transport capabilities.[4,5] While the latter detailed models are indispensible toward achieving an understanding of the complicated physics issues, it is oftentimes appropriate to appeal to simplified models in order to gain physical insight and order of magnitude estimates of the various effects in a noninteractive mode. In this Memo Report it is our intent to bridge the gap between the overly complicated and the overly simplistic approaches by considering a simple dynamic model for the implosion coupled with atomic physics and empirical data based on experimental observation. Our principal result is the establishment of a predictive capability which will serve as a guide for estimating generator power requirements for substantial K-shell radiation for conventional PRS loads.

II. BASIC MODEL ELEMENTS

The equation of motion[1-3] describing the implosion of a plasma annulus when the magnetic pressure greatly exceeds the plasma pressure is

$$m \frac{d^2 r}{dt^2} = \frac{-10^{-7} I(t)^2}{r} \qquad (1)$$

Manuscript approved June 7, 1984.

where m is the annulus mass per unit length (kg m^{-1}), r is the radius (m), and I(t) is the time-varying current (amps). For a wide variety of machines from GAMBLE-II to BLACKJACK 5, the main current pulse is adequately described by a linear ramp $I(t) = -I_o t$ where I_o is the current rise slope in amps sec^{-1}. Fig. 1 shows the actual current pulse for BLACKJACK 5 shot 177 and the corresponding excellent linear fit to I(t) during the main run-in phase. Equation (1) with the linear current fit becomes

$$m \frac{d^2 r}{dt^2} = \frac{-10^{-7} I_o^2 t^2}{r} . \qquad (2)$$

Of course, the resisting plasma pressure late in the run-in will render this simple picture inaccurate. However, considerable evidence from various machines[1-3] strongly indicates that Eq. (2) obtains until the plasma has collapsed to about 10% of its initial radius, at which time the implosion abruptly ceases and the main radiation pulse commences. Our description is based upon this empirical observation. Eq. (2) may be universalized by adopting the following dimensionless variables, where R_o = initial radius in meters.

$$x = r/R_o \qquad (3a)$$

$$q = 1.78 \times 10^{-2} (I_o/R_o)^{1/2} m^{-1/4} t \qquad (3b)$$

Eqs. (3a) and (3b) combined with Eq. (2) lead to

$$x \frac{d^2 x}{dq^2} = - q^2 . \qquad (4)$$

The boundary conditions applied to Eq. (4) are: at t=0, x=1, and all q-derivatives of x are 0, since I(t)=0 at t=0. To our knowledge, no analytic solution of Eq. (4) exists, but a power series solution is obtainable. This series solution converges too slowly to be of real practical value

$$x(q) = 1 - \frac{q^4}{12} - \frac{q^8}{672} - \frac{q^{12}}{15,650} - \ldots\ldots . \qquad (5)$$

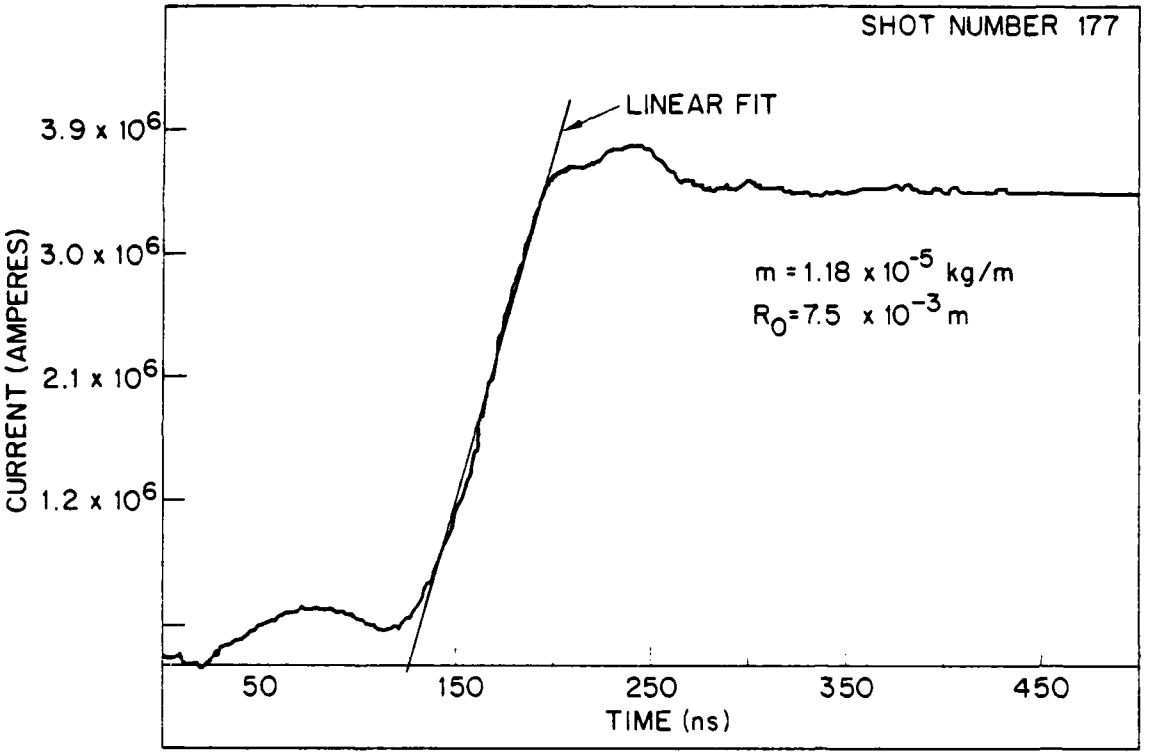

Fig. 1. Current trace for BLACKJACK 5 shot 177, along with the linear fit adopted to describe the major run-in phase. Current trace provided courtesy of Maxwell Laboratories, Inc.

The exact numerical solution of Eq. (4) is presented in Fig. 2. At our "magic" $r/R_o = x = 0.1$, where the implosion is deemed to cease and thermalization begins, the time variable $q = 1.70$, and the implosion velocity $dx/dq = 3.3$. Key physical variables at this point are the kinetic energy per ion and the implosion time. Since $q = 1.70$ the implosion time (sec) is easily obtained from Eq. (3b) as

$$t_{imp} = 95.6 \left(\frac{R_o}{I_o}\right)^{1/2} m^{1/4} \text{ sec.} \tag{6}$$

To obtain the kinetic energy per ion at $x = 0.1$, note the atomic weight $A \approx 1.32\ Z^{1.15}$ where Z is the element's atomic number. Straightforward algebraic manipulation of the variables leads to

$$(KE)_{ion} = \frac{1.64\times10^{-12}\ R_o I_o\ A \left(\frac{dx}{dq}\right)^2}{\sqrt{m}} \text{ eV} \tag{7a}$$

or, since $dx/dq = 3.3$ at $x = 0.1$, and $A \approx 1.32Z^{1.15}$

$$(KE)_{ion} = \frac{2.36\times10^{-11}\ R_o I_o Z^{1.15}}{\sqrt{m}} \text{ eV}\ . \tag{7b}$$

Conventional loads are usually designed[2,3] so that the implosion time, Eq. (6), matches the time of peak current, I_p. In some cases the match is only approximate, but even a 10-20% deviation does not substantially change our results. The current slope $I_o = I_p/t_{imp}$. Using Eq. (6) for the implosion time, t_{imp}, leads to a relationship between I_o and I_p

$$I_o = \frac{1.09\times10^{-4}\ I_p^2}{R_o \sqrt{m}} \text{ amps sec}^{-1}. \tag{8}$$

Substituting for I_o in Eq. (7b) we finally obtain the following expression for kinetic energy per ion at 10% of the initial radius, where we assume that thermalization and conversion to radiation of the kinetic energy occurs, viz.

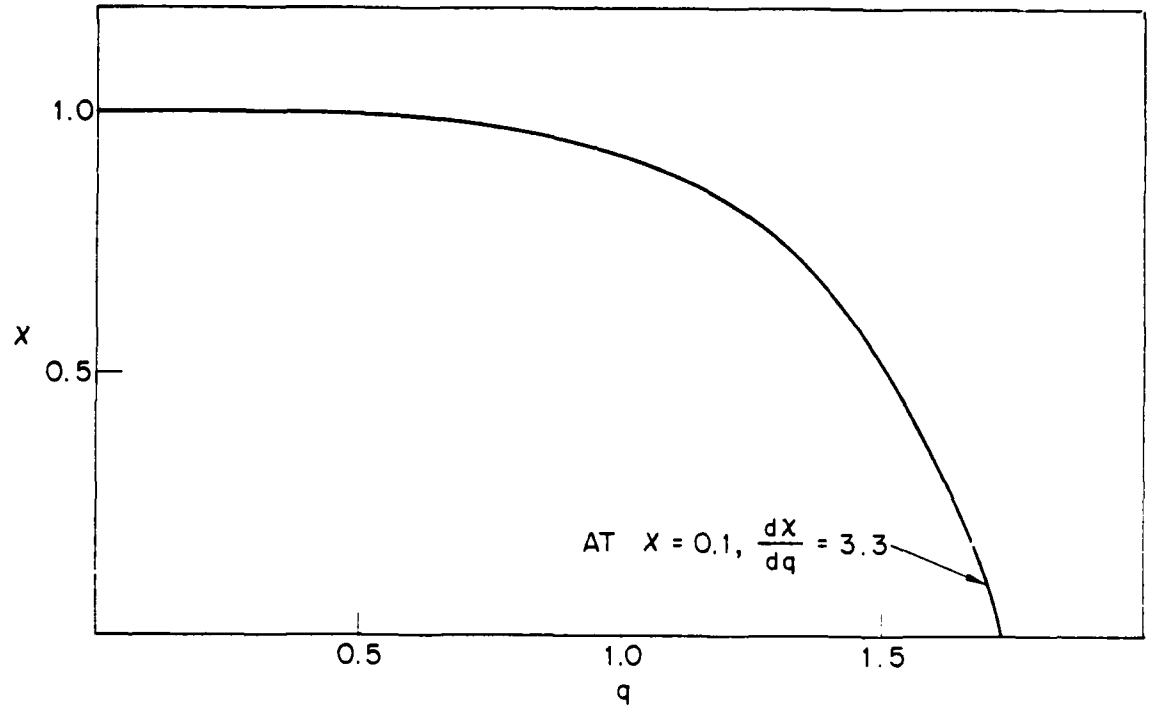

Fig. 2. The exact numerical solution x(q) to Eq. (4) is plotted.

$$(KE)_{ion} = \frac{2.5\times10^{-15}\ I_p^{\,2}\ Z^{1.15}}{m}\ \text{eV} \ . \qquad (9)$$

III. BASIC ATOMIC PHYSICS ENERGETICS

If the K-shell of a given element is to be excited, an expended minimum of energy which must be imparted to each imploding ion is that needed to strip all but one or two electrons from the ion plus the energy needed to maintain each stripped electron at an appropriate temperature conducive to K-shell dominance. Of course inefficiencies and losses-particularly radiative - imply that in general much more energy than this is needed. However, much insight into basic Z-scaling may be obtained by consideration of these basic quantities.

The temperature at which copious K-shell radiation has been observed in Z-pinches is given approximately by

$$T \approx 1300\ \left(\frac{Z}{18}\right)^2\ \text{eV} \ . \qquad (10)$$

We approximate the number of stripped electrons as equalling Z. Therefore, to maintain the stripped electrons from an ion of atomic number Z at this temperature requires,

$$E_m \approx 4\ Z^3\ \text{eV/ion.} \qquad (11)$$

The energy needed to strip the electrons from each ion is obviously also important and non-negligible. We shall assume that the plasma is 50% hydrogen-like and 50% helium-like. The ionization potentials for each element are available from many references; we have used the data of Carlson et al.[6] The energy needed to strip an ion of atomic number Z to a mean charge state of Z-1.5 is given by the following fit - which for the approximate treatment of this report has negligible error.

$$E_s \approx 3.83\ Z^{2.64}\ \text{eV/ion} \qquad (12)$$

Obviously, the expended minimum of energy per ion required is given by E_m+E_s. We now inject another empirical observation. A critical question is, in practice, how much energy per ion is required for copious K-shell radiation in Z-pinches? BLACKJACK 5 shot 177, an aluminum wire array implosion which produced ~ 20 kJ of K-line radiation was one of the best diagnosed shots in the BLACKJACK 5 series. From the current trace, spectroscopic diagnosis, and known characteristics of the load, it was determined that 3.6×10^5 eV was needed, on average, to produce a K-shell ion in this shot. This number is 30 times $E_m + E_s$. We now make the assumption that for all Z, 30 times (E_m+E_s) will be required for efficient K-shell production. Such a large factor is plausible when one considers the numerous sinks for generator energy other than production of K-shell radiation. Such processes include joule heating early in the implosion, radiative losses other than K-shell, thermal conduction losses, and inductive losses. This is not unreasonable as a first approximation since it allows radiative and other losses to scale upward with Z in the same fashion as the kinetic and ionization energies, which is intuitively reasonable. This factor of 30 can be viewed optimistically, since it indicates much room for improvements in efficiency of these devices. This assumption means that

$$(KE)_{ion} = 30\ (4Z^3 + 3.83\ Z^{2.64}) \approx 187\ Z^{2.95}\ \text{eV/ion} \qquad (13)$$

where, in Eq. (13) the additional simplification of the power-law sum to a single power law does not result in substantial error for present purposes. Perhaps the most important single step in our development now follows, namely equating Eq. (13), the <u>required</u> kinetic energy per ion, to Eq. (9) the <u>actually imparted</u> kinetic energy per ion

$$\frac{2.5\times10^{-15}\ I_p^{\,2} Z^{1.15}}{m} = 187\ Z^{\,2.95} \qquad (14)$$

which yields

$$m = 1.34\times10^{-17}\ I_p^{\,2}\ Z^{-1.8}\ \text{kg/m} \qquad (15)$$

for the mass per unit length which can be stripped to the K-shell for an element of atomic number Z with a peak machine current I_p amps.

An ion density may be obtained from Eq. (15) if the radius of implosion is known. No systematic variation of the pinch diameter with Z has been seen; we adopt 1.34 mm as an approximate average which was observed on successful shots using pinhole imagery, and assume future machines will produce similar pinches. Given the total mass, the mass per ion (2.19×10^{-27} $Z^{1.15}$ kg), and the cylinder radius the K-shell ion density is obtained easily as

$$N_I = 4.33\times10^{9}\ I_p^{\,2}\ Z^{-2.95}\ \text{cm}^{-3}\ . \tag{16}$$

From extensive spectroscopic density and temperature diagnostics, we have determined that the yield on <u>previous</u> shots obeys the following function of temperature T(eV) and ion density $N_I(\text{cm}^{-3})$.

$$Y(\text{kJ}) \approx 142\left(\frac{Z}{18}\right)^{2}\left[\frac{N_I}{3.7\times10^{19}\left(\frac{Z}{18}\right)^{2}}\right]^{1.9}\exp\left[-2\times10^{3}\left(\frac{Z}{18}\right)^{2}/T\right] \cdot \min\left[1.0,\ 2\times10^{3}\left(\frac{Z}{18}\right)^{2}/T\right]\ . \tag{17}$$

We emphasize that Eq. (17) is not based on any hydrodynamics; only on spectroscopic measurements of N_I and T coupled with knowledge of the yield on the diagnosed shots. The 1.9 power law of N_I (instead of the usual 2.0) represents an approximate correction for opacity effects. Letting T = 1300 $(Z/18)^2$ eV (Eq. 10), Eq. (17) is greatly simplified to

$$Y = 3.66\ \text{x}\ 10^{-34}\ N_I^{1.9}\ Z^{-1.8}\ \text{KJ}\ . \tag{18}$$

Substituting for N_I from the zero dimensional hydrodynamics - atomic energetics model, given by Eq. (16) we obtain

$$Y(\text{kJ}) = 7.46\ \text{x}\ 10^{-16}\ I_p^{3.8}\ Z^{-7.405}\ \ \text{KJ}. \tag{19}$$

For BLACKJACK 5 the power in TW (P) is given approximately as $3.86\ \text{x}\ 10^{-13}\ I_p^{\,2}$, resulting in the following alternative form of Eq. (19).

$$Y(KJ) = 2.87 \times 10^{8} P^{1.9} Z^{-7.405} KJ . \quad (20)$$

IV. CONCLUSIONS

We have combined scaling laws for empirically observed yield as a function of spectroscopically diagnosed temperature and density with basic atomic physics energetics and a standard zero-dimensional equation of motion for an imploding Z-pinch load to obtain a prediction for yield for any element as a function of peak current (Eq. 19) or of BLACKJACK 5 - type machine power (Eq. 20). The predictions of Eq. 20 are listed in the accompanying table, along with the actual BLACKJACK 5 optimized yields. Clearly this model does a very good job of describing previous results. When it is applied to more powerful machines contemplated for future construction several important implications are seen. First, a 25-TW generator would render a conventional argon load a very prolific PRS, with K-shell yields probably exceeding 50 KJ. Somewhat larger powers in the 40-50 TW range would be needed for similar success with titanium. Finally, conventional loads consisting of iron or krypton will require, for substantial K-shell line radiation, superclass generators in the 50-100 TW range.

Further review of the table shows that by doubling the generator power the K-shell radiative yield quadruples. This suggests that more current would couple into the load to heat the plasma and that the plasma becomes hotter, i.e., the excitation temperature associated with the K-shell emitting region is higher. The question of whether more current actually will couple to the load is somewhat speculative in the sense that there are no direct measurements of current in the vicinity of the load but only measurements of the return current. Also evident from the table and Eq. (20) is that there is a tremendous price to pay in terms of energy expenditure in stripping moderate and high Z-elements down to and maintaining the K-shell plasma. The sequence of events leading to K-shell emission involves both heating and compressing the plasma. Nature is not kind to these schemes. It might be more efficient to devise schemes and design loads that first compress and then heat the plasma.

It is certainly possible that advanced concepts for improving both machine technology and the pinch itself through better understanding of the influence of current pulse duration and crucial plasma instabilities may favorably alter these predictions. For instance, a number of novel experiments involving pulse shaping through such devices as the plasma erosion opening switch are being investigated to determine whether it is possible to enhance K-shell yields in conventional PRS loads. Unless a greater bulk of the plasma can be heated and/or further compressed through pulse shaping it is difficult to conceive how the energy expenditure for stripping and maintaining a K-shell plasma can be reduced from the efficiency factors discussed here.

TABLE: Prediction of Eq. (20) for K-shell yield in kilojoules as a function of atomic number Z and generator power in TW. A BLACKJACK 5-type machine with a load length of 3 cm is assumed. The asterisk indicates where the prediction is probably invalid due to burnthrough of the K-shell. The numbers in parentheses are Maxwell Laboratories' optimized results, courtesy of M. Gersten.

Z	Element	5	10	25	50	100
13	Aluminum	34.4 (40)	128.6*	*	*	*
18	Argon	3.1	11.6 (15)	65.9	*	*
20	Calcium	1.42	5.3 (4.0)	30.2	*	*
22	Titanium	0.7	2.6 (2)	14.9	55.6	*
26	Iron	0.2	0.75	4.32	16.1	60.3
30	Zinc	0.07	0.26	1.5	5.6	20.9
36	Krypton	0.02	0.07	0.4	1.45	5.4

ACKNOWLEDGMENTS

The Plasma Radiation Branch would like to thank S. Wong of Physics International Corporation and M. Gersten of Maxwell Laboratories, Inc. for providing much useful information as well as valuable and informative discussions.

This work was supported by the Defense Nuclear Agency.

REFERENCES

1. D. Mosher and S. J. Stephanakis, NRL Memorandum Report 3321, July 1976.

2. J. Katzenstein, J. Appl. Phys. 52, 676 (1981).

3. W. Clark, R. Richardson, J. Brannon, M. Wilkinson, and J. Katzenstein, J. Appl. Phys. 53, 5552 (1982).

4. R. E. Terry and J. U. Guillory, JAYCOR Report No. DNA 6153F, 1 April 1982.

5. J. Davis, P. Kepple, and R. Clark, MRHD of an Argon Z-Pinch Plasma, in preparation.

6. T. A. Carlson, C. W. Nestor, Jr., N. Wasserman, and J. D. McDowell, Atomic Data 2, 63 (1970).

DISTRIBUTION LIST

Assistant to the Secretary of Defense Atomic Energy Washington, D.C. 20301 ATTN: Executive Assistant	1 Copy
Defense Technical Information Center Cameron Station 5010 Duke Street Alexandria, Va 22314	2 copies
Director Defense Intelligence Agency Washington, D.C. 20301 ATTN: DT-1B R. Rubenstein	1 Copy
Director Defense Nuclear Agency Washington, D.C. 20305	
ATTN: DDST	1 copy
ATTN: TITL	4 copies
ATTN: RAEV	1 copy
ATTN: STVI	1 copy
Commander Field Command Defense Nuclear Agency Kirtland AFB, New Mexico 87115 ATTN: FCPR	1 Copy
Chief Field Command Livermore Division Department of Defense P.O. Box 808 Livermore, CA 94550 ATTN: FCPRL	1 Copy
Director Joint Strat TGT Planning Staff Offutt AFB Omaha, Nebraska 68113 ATTN: JSAS	1 Copy

PREVIOUS PAGE IS BLANK

Undersecretary of Defense
for RSCH and ENGRG
Department of Defense
Washington, D.C. 20301
ATTN: Strategic and Space Systems (OS)

1 Copy

Deputy Chief of Staff for RSCH DEV and ACQ
Department of the Army
Washington, D.C. 20301
ATTN: DAMA-CSS-N

1 Copy

Commander
Harry Diamond Laboratories
Department of the Army
2800 Powder Mill Road
Adelphi, MD 20783
ATTN: DELHD-N-NP
ATTN: DELHD-R J. Rosado
ATTN: DELHD-TA-L (Tech. Lib.)

1 copy each

U.S. Army Missile Command
Redstone Scientific Information Center
Attn: DRSMI-RPRD (Documents)
Redstone Arsenal, Alabama 35809

3 Copies

Commander
U.S. Army Missile Command
Redstone Arsenal, Alabama 35898
ATTN: DRCPM-PE-EA

1 copy

Commander
U.S. Army Nuclear and Chemical Agency
7500 Backlick Road
Building 2073
Springfield, VA 22150
ATTN: Library

1 copy

Commander
U.S. Army Test and Evaluation Command
Aberdeen Proving Ground, MD 21005
ATTN: DRSTE-EL

1 Copy

Commanding Officer
Naval Intelligence Support Center
4301 Suitland Road, Bldg. 5
Washington, D.C. 20390
ATTN: NISC-45

1 Copy

Commander — 1 Copy
Naval Weapons Center
China Lake, CA 93555
ATTN: Code 233 (Tech. Lib.)

Officer in Charge — 1 copy each
White Oak Laboratory
Naval Surface Weapons Center
Silver Spring, MD 20910
ATTN: Code R40
ATTN: Code F31

Air Force Weapons Laboratory — 1 copy each
Kirtland AFB, New Mexico 87117
ATTN: SUL
ATTN: CA
ATTN: APL
ATTN: Lt. Col. Generosa

Deputy Chief of Staff
Research, Development and Accounting — 1 Copy
Department of the Air Force
Washington, D.C. 20330
ATTN: AFRDQSM

Space and Missile Systems Organization/IN — 1 Copy
Air Force Systems Command
P. O. Box 92960
Worldway Postal Center
Los Angeles, CA 90009
ATTN: IND D. Muskin (Intelligence)

HQ BMO/MM — 1 Copy
Norton AFB, CA 92409
ATTN: Col. J. M. Wells

Space and Missile Systems Organization/SK — 1 Copy
Air Force Systems Command
Post Office Box 92960
Worldway Postal Center
Los Angeles, CA 90009
ATTN: SKF P. Stadler (Space Comm. Systems)

AVCO Research and Systems Group — 1 Copy
201 Lowell Street
Wilminton, MA 01887
ATTN: Library A830

BDM Corporation
7915 Jones Branch Drive
McLean, Virginia 22101
ATTN: Corporate Library

1 Copy

Berkeley Research Associates
P.O. Box 983
Berkeley, CA 94701
ATTN: Dr. Joseph Workman

1 Copy

Berkeley Research Associates
P.O. Box 852
5532 Hempstead Way
Springfield, VA 22151
ATTN: Dr. Joseph Orens
ATTN: Dr. Nino Pereira

1 Copy each

Boeing Company
P. O. Box 3707
Seattle, WA 98134
ATTN: Aerospace Library

1 Copy

The Dikewood Corporation
1613 University Bldv., N.E.
Albuquerque, New Mexico 8710
ATTN: L. Wayne Davis

1 Copy

EG and G Washington Analytical
Services Center, Inc.
P. O. Box 10218
Albuquerque, New Mexico 87114
ATTN: Library

1 Copy

General Electric Company
Space Division
Valley Forge Space Center
P. O. Box 8555
Philadelphia, PA 19101
ATTN: J. Peden

1 Copy

General Electric Company - Tempo
Center for Advanced Studies
816 State Street
P.O. Drawer QQ
Santa Barbara, CA 93102
ATTN: DASIAC

Institute for Defense Analyses — 1 Copy
1801 N. Beauregard St.
Alexandria, VA 22311
ATTN: Classified Library

IRT Corporation — 1 Copy
P.O. Box 81087
San Diego, CA 92138
ATTN: R. Mertz

JAYCOR — 1 Copy
11011 Forreyane Rd.
P.O. Box 85154
San Diego, CA 92138
ATTN: E. Wenaas

JAYCOR — 1 Copy
205 S. Whiting Street, Suite 500
Alexandria, VA 22304
ATTN: R. Sullivan

KAMAN Sciences Corp. — 1 copy each
P. O. Box 7463
Colorado Springs, CO 80933
ATTN: J. Hoffman
ATTN: A. Bridges
ATTN: D. Bryce
ATTN: W. Ware

Lawrence Livermore National Laboratory — 1 copy each
University of California
P.O. Box 808
Livermore, California 94550
Attn: DOC CDN for L-153
Attn: DOC CDN for L-47 L. Wouters
Attn: DOC CDN for Tech. Infor. Dept. Lib.

Lockheed Missiles and Space Co., Inc. — 1 copy each
P. O. Box 504
Sunnyvale, CA 94086
Attn: S. Taimlty
Attn: J.D. Weisner

Lockheed Missiles and Space Co., Inc. — 1 Copy
3251 Hanover Street
Palo Alto, CA 94304
Attn: J. Perez

Maxwell Laboratory, Inc. — 1 Copy each
9244 Balboa Avenue
San Diego, CA 92123
ATTN: A. Kolb
ATTN: M. Montgomery
ATTN: J. Shannon

McDonnell Douglas Corp. — 1 Copy
5301 Bolsa Avenue
Huntington Beach, CA 92647
ATTN: S. Schneider

Mission Research Corp. — 1 Copy each
P. O. Drawer 719
Santa Barbara, CA 93102
ATTN: C. Longmire
ATTN: W. Hart

Mission Research Corp.-San Diego — 1 Copy
5434 Ruffin Rd.
San Diego, California 92123
ATTN: Victor J. Van Lint

Northrop Corporation — 1 Copy
Northrop Research and Technology Center
1 Research Park
Palos Verdes Peninsula, CA 90274
ATTN: Library

Northrop Corporation — 1 Copy
Electronic Division
2301 120th Street
Hawthorne, CA 90250
ATTN: V. Damarting

Physics International Company — 1 Copy each
2700 Merced Street
San Leandro, CA 94577
Attm: C. Stallings
Attn: C. Gilman

R and D Associates — 1 Copy each
P.O. Box 9695
Marina Del Rey, CA 90291
ATTN: W. Graham, Jr.
ATTN: P. Haas

Sandia National Laboratories
P.O. Box 5800
Albuquerque, New Mexico 87115
ATTN: Doc Con For 3141
ATTN: D. McDaniel

1 copy each

Science Applications, Inc.
P. O. Box 2351
La Jolla, CA 92038
ATTN: J. Beyster

1 copy

Spire Corporation
P. O. Box D
Bedford, MA 01730
ATTN: R. Little

1 copy

SRI International
333 Ravenswood Avenue
Menlo Park, CA 94025
ATTN: S. Dairiki

1 copy

S-CUBED
P. O. Box 1620
La Jolla, CA 92038
ATTN: A. Wilson

1 copy

Texas Tech University
P.O. Box 5404
North College Station
Lubbock, TX 79417
ATTN: T. Simpson

1 copy

TRW Defense and Space Systems Group
One Space Park
Redondo Beach, CA 90278
ATTN: Technical Information Center

1 Copy

Vought Corporation
Michigan Division
38111 Van Dyke Road
Sterling Heights, Maine 48077
ATTN: Technical Information Center
(Formerly LTV Aerospace Corp.)

1 Copy

Naval Research Laboratory
Plasma Radiation Branch
Washington, D.C. 20375

Code 4720	-	50 Copies
Code 4700	-	26 Copies
Code 2628		20 Copies

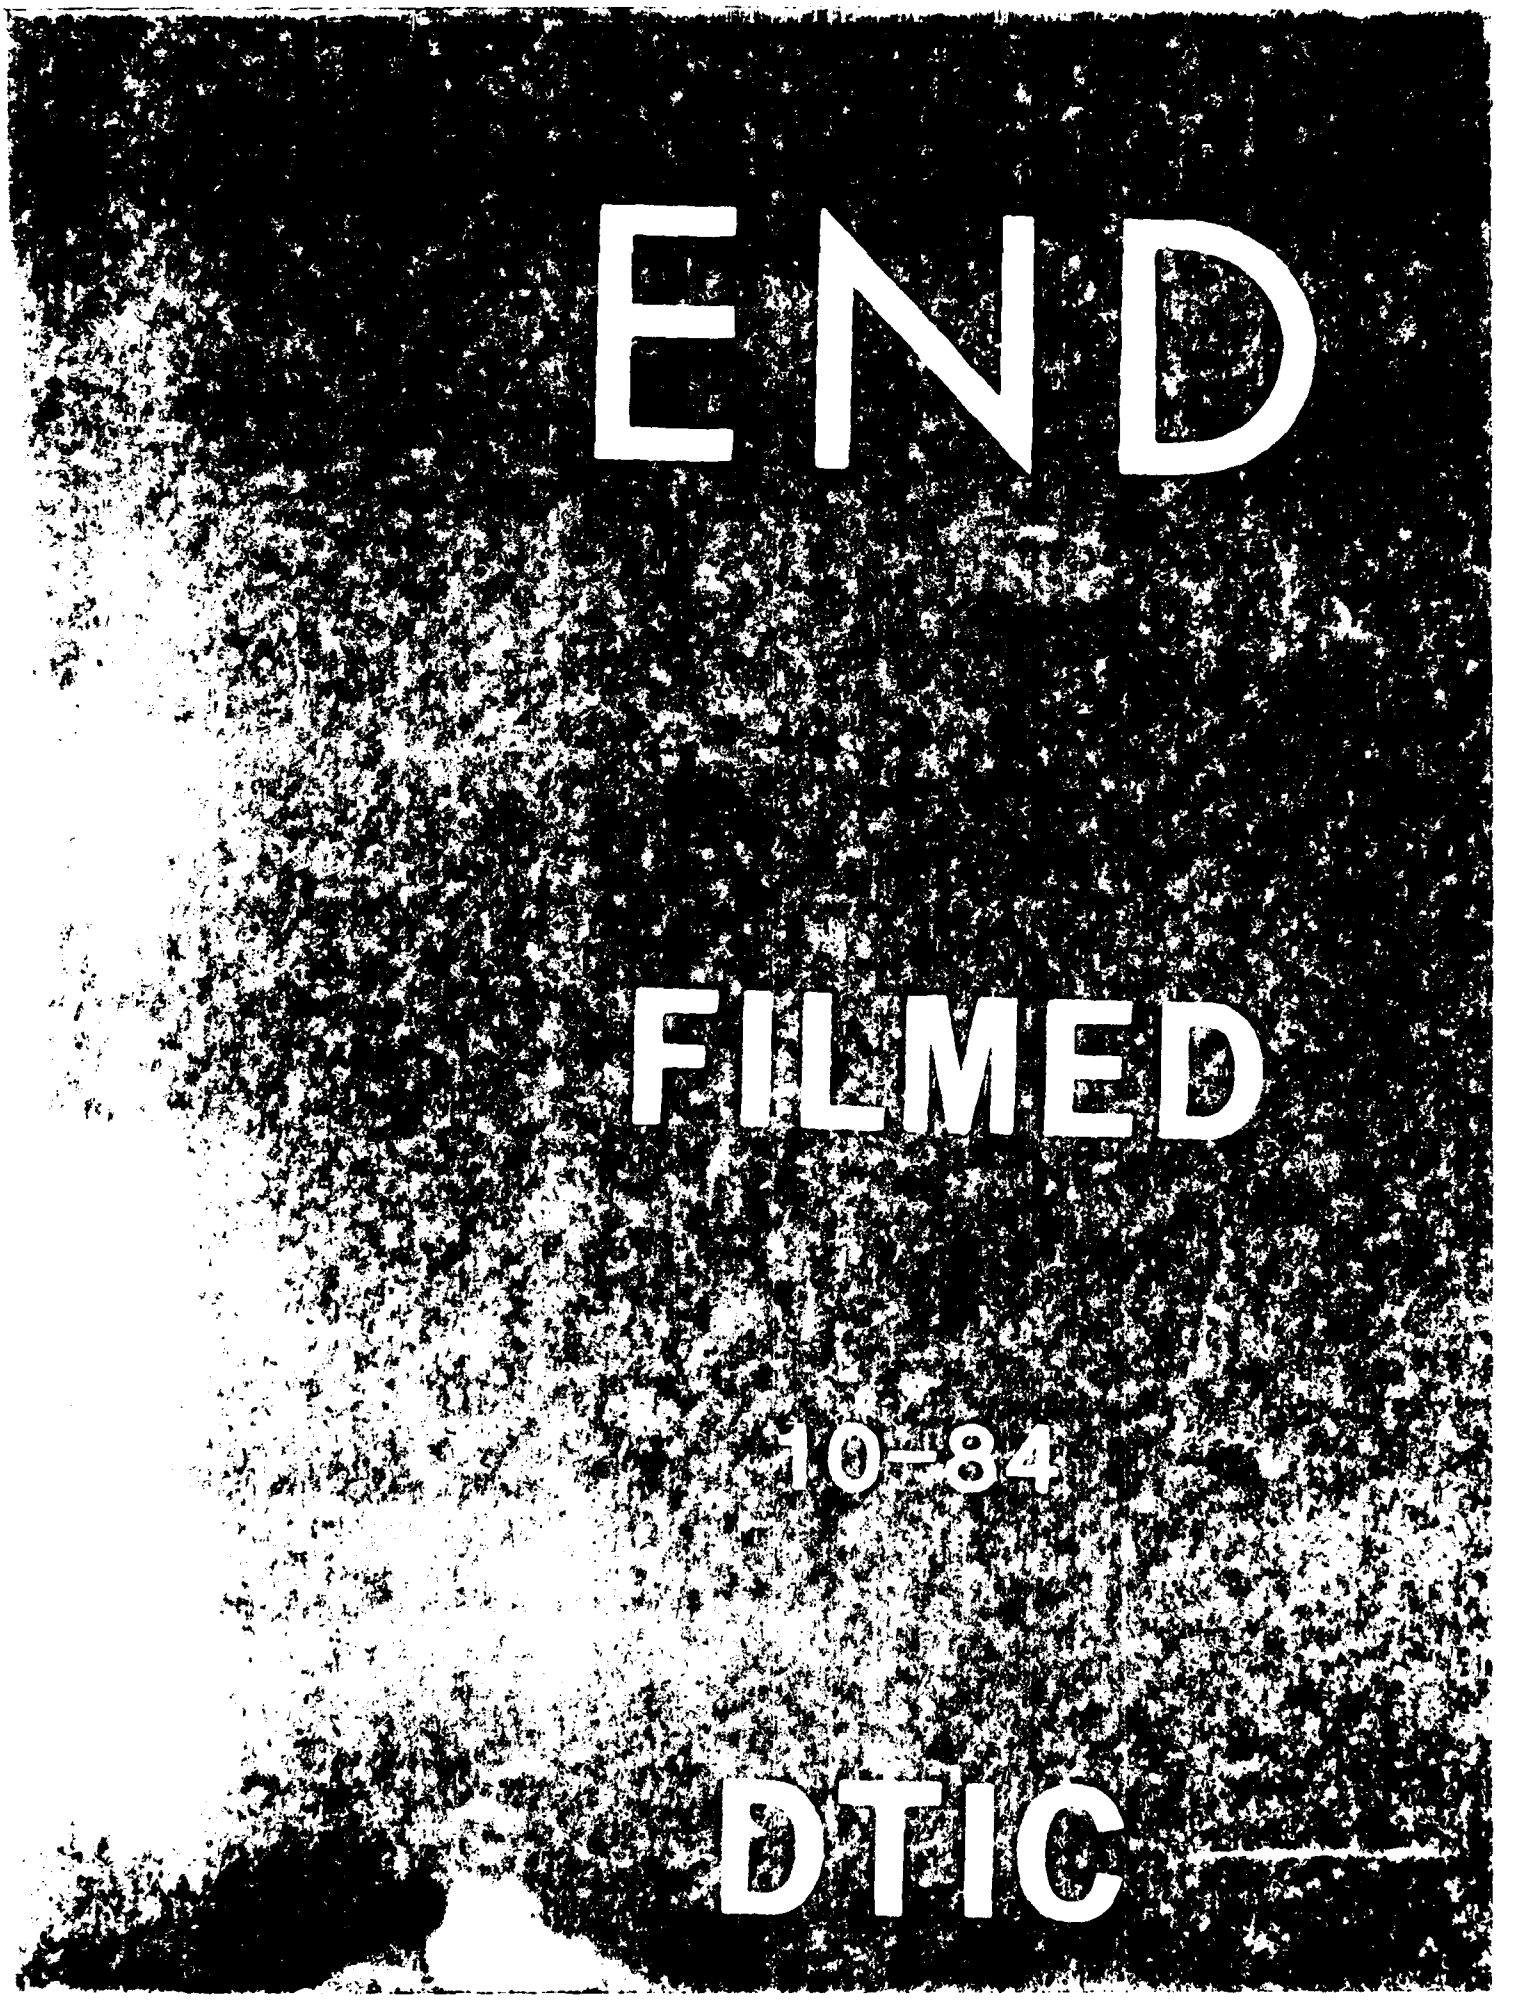
END
FILMED
10-84
DTIC